

NEV series cable glands are suitable for use in areas with the risk of explosion, allowing the direct insertion of armoured cables in explosion proof enclosures. They are supplied with a sealing ring which is stretched over the cable at the inlet to guarantee 'Ex d' execution, and a second compression ring which is stretched over the cable armour at the outlet to guarantee an IP 66/68 protection rating. The result is a cable gland which provides maximum performance in terms of reliability and safety over time, is compatible with a wide range of the main, commercially available cables, and complies with the most recent applicable regulations. Their structure makes them suitable for environments which are particularly difficult, such as marine environments, or where there are subjected to the mechanical stresses and impacts which often occur in heavy industry, where safety is the utmost priority.



Classification: 2014/34/EU	Group II	Category 2GD/3G
Installation: EN 60079.14	zone 1 - zone 2 (Gas)	zone 21 - zone 22 (Dust)
Marking:	CE 0722 Ex II 2 GD - Ex db IIC Gb - Ex eb IIC Gb II 2 D - Ex tb IIIC Db II 3G Ex nR IIC Gc - IP66/68	
Certification:	ATEX (category 2): IMQ 17 ATEX 016X	
	ATEX (category 3): IMQ 17 ATEX 017X	
	IEC Ex IECEx IMQ 17.0010X	All IEC Ex and TR CU certification data can be downloaded at www.cortemgroup.com
	TR CU AVAILABLE	
Standards:	CENELEC EN 60079-0: 2012+A11:2013, EN 60079-1: 2016, EN 60079-7: 2015, EN 60079-15: 2012, EN 60079-31: 2015 and EUROPEAN DIRECTIVE 2014/34/EU IEC60079-0: 2011 IEC60079-1: 2014 IEC60079-7: 2015 IEC60079-15: 2015 IEC60079-31: 2013 RoHS Directive 2002/95/EC	
 Operating temperature:	-60 °C +130 °C	
Protection rating:	IP66/68 (30 meters - 12 hours)	
Design	BS 6121: Part 1:1989, IEC 62444, EN 62444	

Certificates are available on www.cortemgroup.com

Interactive Point



See Video with assembly instructions for NEV.. (light armoured)




See Video with assembly instructions for NEV.. (heavy armoured)

ACCESSORIES UPON REQUEST

Locknuts	ISO thread	Nickel-plated brass		Galvanized steel	Stainless steel	Sealing ring for flat/healing cables	Black TPV protector	Cableglands		Code		
	M16x1,5	DL01IB		DL01IG	DL01IS			NEV01NB	NEV16IB	PGA1F		
	M20x1,5	DL11IB		DL11IG	DL11IS			NEV1SNB	NEV20SIB	PGA1N		
	M25x1,5	DL21IB		DL21IG	DL21IS			NEV1NB	NEV20IB	PGA1		
	M32x1,5	DL31IB		DL31IG	DL31IS			NEV2NB	NEV25IB	PGA2N		
	M40x1,5	DL41IB		DL41IG	DL41IS			NEV3NB	NEV32IB	PGA4		
	M50x1,5	DL51IB		DL51IG	DL51IS			NEV4NB	NEV40IB	PGA4		
	M63x1,5	DL61IB		DL61IG	DL61IS			NEV5SNB	NEV50SIB	PGA5		
	M75x1,5	DL71IB		DL71IG	DL71IS			NEV5NB	NEV50IB	PGA5N		
	M90x1,5	DL81IB		DL81IG	DL81IS			NEV6SNB	NEV63SIB	PGA6		
	M100x1,5	DL10IB		DL10IG	DL10IS			NEV6NB	NEV63IB	PGA7		
M115x1,5	DL115IB		DL115IG	DL115IS		NEV7SNB	NEV75SIB	GTR7 Heat shrinkable				
						NEV7NB	NEV75IB					
						NEV8NB	NEV90IB					
						NEV9NB	NEV100IB					
						NEV10NB	NEV115IB					
Nickel-plated brass earthing rings	ISO thread	Nickel-plated brass	Stainless steel	Serrated stainless steel lock washers	Code	Adapters and reducers of the RE... series						
	M16x1,5	A0131B	A0131S		RD101IS/A4							
	M20x1,5	A1311IB	A1311IS		RD11IS/A4							
	M25x1,5	A2312IB	A2312IS		RD12IS/A4							
	M32x1,5	A3313IB	A3313IS		RD13IS/A4							
	M40x1,5	A4314IB	A4314IS		RD14IS/A4							
	M50x1,5	A5315IB	A5315IS		RD15IS/A4							
	M63x1,5	A6316IB	A6316IS		RD16IS/A4							
	M75x1,5	A731B	A731S									
	M90x1,5	A831B	A831S									
	M100x1,5	A103110IB	A103110IS									
	M115x1,5	A1031B	A1031S									

* For different threads, contact the sales department.

* For different threads, contact the sales department.

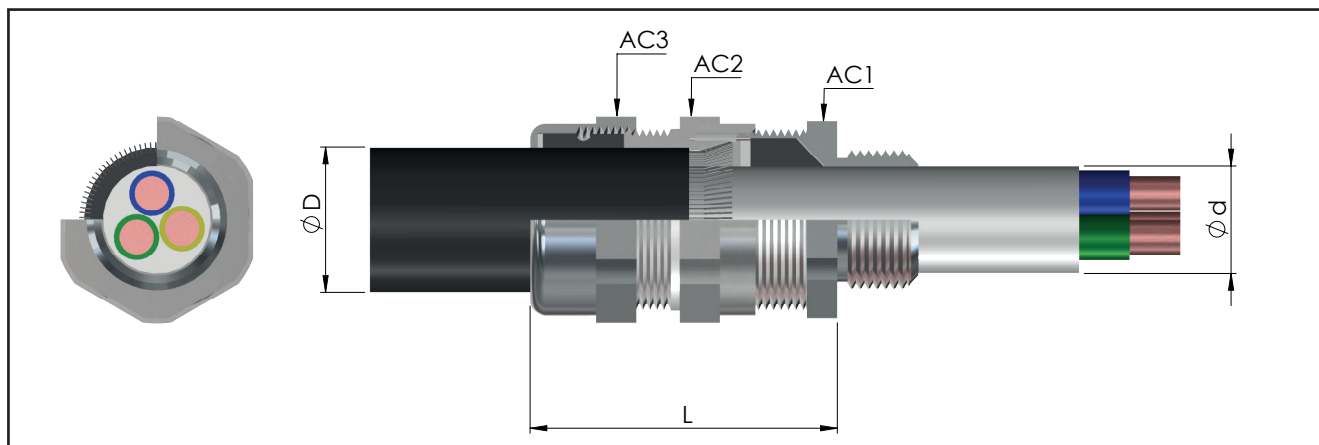


CABLE GLAND SELECTION TABLE

Code Nickel-plated brass	Thread	Code Nickel-plated brass	Thread	Dimensions in mm				Range		Armour thickness	Weight Kg
				AC1	AC2	AC3	L	$\varnothing d$ min-max Internal cable sheath	$\varnothing D$ min-max Outer sheath of the cable		
NEV01NB	3/8" NPT	NEV16IB	M16x1,5	24	24	24	59	3.5 - 8.6	6 - 13.2	0.2 - 1.3	0,145
NEV1SNB	1/2" NPT	NEV20SIB	M20x1,5	24	26	26	59	6.3 - 11.6	9.5 - 16	0.2 - 1.3	0,157
NEV1NB	1/2" NPT	NEV20IB	M20x1,5	30	32	32	61	6.5 - 14	12.5 - 21	0.2 - 1.4	0,215
NEV2NB	3/4" NPT	NEV25IB	M25x1,5	36	38	38	61	11 - 20	20 - 27.5	0.2 - 1.6	0,261
NEV3NB	1" NPT	NEV32IB	M32x1,5	45	47	47	72	17 - 27	23.5 - 34	0.2 - 2.0	0,433
NEV4NB	1 1/4" NPT	NEV40IB	M40x1,5	50	52	52	73	22 - 32	26 - 40	0.2 - 2.2	0,514
NEV5SNB	1 1/2" NPT	NEV50SIB	M50x1,5	55	57	57	80	29.5 - 38	35 - 46.5	0.2 - 2.5	0,610
NEV5NB	2" NPT	NEV50IB	M50x1,5	62/60*	62	62	81	35.5 - 44	38 - 53	0.2 - 2.5	0,562
NEV6SNB	2" NPT	NEV63SIB	M63x1,5	68	75	77	91	40 - 50	45.5 - 59.5	0.2 - 2.5	1,151
NEV6NB	2 1/2" NPT	NEV63IB	M63x1,5	75/73*	80	82	93	47 - 56	54.5 - 66	0.2 - 2.5	1,100
NEV7SNB	2 1/2" NPT	NEV75SIB	M75x1,5	80	85	90	97	53 - 62	57 - 72	0.2 - 2.8	1,308
NEV7NB	3" NPT	NEV75IB	M75x1,5	90/85*	95	100	99	59 - 68	66.5 - 78.5	0.2 - 2.8	1,538
NEV8NB	3" NPT	NEV90IB	M90x1,5	100	105	110	104	66 - 79	76.5 - 90	0.2 - 2.8	2,000
NEV9NB	3 1/2" NPT	NEV100IB	M100x1,5	115	120	120	111	76 - 91	86 - 101	0.2 - 3.3	2,381
NEV10NB	4" NPT	NEV115IB	M115x1,5	120	125	130	112	86 - 98	100 - 110	0.2 - 3.5	2,783

* Dimensions with threaded: NPT / ISO

Sample order code

NEV	6	N	B
MODEL	SIZE	THREAD	MATERIAL

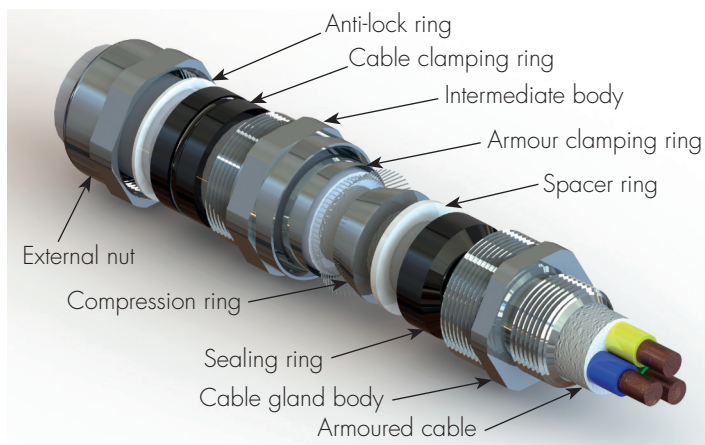

TECHNICAL NOTES:

- Silicone o-rings are supplied for cylindrical threads (ISO metric) for the pre-assembled IP seal on the cable gland
- The ISO7/1 thread version is available upon request (sample code NEV1B)
- Also available in stainless steel AISI 316 (sample code NEV1S)
- Other materials on request
- For "Ex i" intrinsic safety version, RAL 5015 blue nut (sample code NEV1SIA)
- Internal ring for armoured cables with larger cross-section