


The NAVBF series barrier cable glands for non-armoured cable, with a female threaded outlet fitting, are designed to guarantee the IP66/67 protection and the explosion protection 'Ex db IIC; Ex eb IIC' in applications where installation requirements are needed in accordance with the EN - IEC 60079-14: 2015 standard. The barrier is shaped around the conductors thanks to the particular mixture that flows through them in the special bushing ensuring a complete seal. The liquid resin used prevents the formation of air pockets or voids between the conductors and the bushing (typical problems found with malleable resins). Resin kit available separately.



Classification: 2014/34/EU	Group II	Category 2GD/3G
Installation: EN 60079-14	zone 1 - zone 2 (Gas)	zone 21 - zone 22 (Dust)
Marking:	CE 0722 Ex II 2 GD - Ex db IIC Gb - Ex eb IIC Gb II 2 D - Ex tb IIC Db II 3G Ex nR IIC Gc	
Certification:	ATEX (category 2):	IMQ 19 ATEX 019X
	ATEX (category 3):	IMQ 19 ATEX 020X
	IEC Ex	IECEx IMQ 19.0003X
	TR CU	Work in progress
Standards:	CENELEC EN 60079-0: 2012+A11:2013, EN 60079-1: 2016, EN 60079-7: 2015, EN 60079-15: 2012, EN 60079-31: 2015 and EUROPEAN DIRECTIVE 2014/34/UE IEC60079-0: 2011, IEC60079-1: 2014, IEC60079-7: 2015, IEC60079-15: 2015, IEC60079-31: 2013 RoHS Directive 2002/95/CE	
Operating temperature:	-60°C +100°C	
Protection rating:	IP66/67	
Design	BS 6121: Part 1:1989, IEC 62444, EN 62444	

All IEC Ex certification data can be downloaded at www.cortemgroup.com


Certificates are available on www.cortemgroup.com

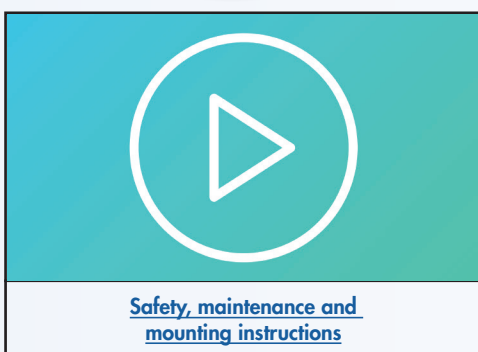

ACCESSORIES UPON REQUEST

Locknuts	ISO thread	Nickel-plated brass	Galvanized steel	Stainless steel	Black TPV protector	Cableglands	Code
	M16x1,5	DL01IB	DL01IG	DL01IS		NAVBF01NB NAVBF16IB	PGA1F
	M20x1,5	DL11IB	DL11IG	DL11IS		NAVBF1SNB NAVBF20SIB	PGA1N
	M25x1,5	DL21IB	DL21IG	DL21IS		NAVBF1NB NAVBF20IB	PGA1
	M32x1,5	DL31IB	DL31IG	DL31IS		NAVBF2NB NAVBF25IB	PGA2N
	M40x1,5	DL41IB	DL41IG	DL41IS		NAVBF3NB NAVBF32IB	PGA4
	M50x1,5	DL51IB	DL51IG	DL51IS		NAVBF4NB NAVBF40IB	PGA4
	M63x1,5	DL61IB	DL61IG	DL61IS		NAVBF5NB NAVBF50SIB	PGA5
	M75x1,5	DL71IB	DL71IG	DL71IS		NAVBF5NB NAVBF50IB	PGA5N
	M90x1,5	DL81IB	DL81IG	DL81IS		NAVBF6SNB NAVBF63SIB	PGA6
	M100x1,5	DL10IB	DL10IG	DL10IS		NAVBF6NB NAVBF63IB	PGA6
	M115x1,5	DL115IB	DL115IG	DL115IS		NAVBF7SNB NAVBF75SIB	PGA7
	M16x1,5	A0131B	A0131S	RD101S/A4		NAVBF7NB NAVBF75IB	GTR7 Heat shrinkable
	M20x1,5	A1311B	A1311S	RD11S/A4		NAVBF8NB NAVBF90IB	
	M25x1,5	A2312B	A2312S	RD12S/A4		NAVBF9NB NAVBF100IB	
	M32x1,5	A3313B	A3313S	RD13S/A4		NAVBF10NB NAVBF115IB	
	M40x1,5	A4314B	A4314S	RD14S/A4			
	M50x1,5	A5315B	A5315S	RD15S/A4			
	M63x1,5	A6316B	A6316S	RD16S/A4			
	M75x1,5	A731B	A731S				
	M90x1,5	A831B	A831S				
	M100x1,5	A10310IB	A10310IS				
	M115x1,5	A1031B	A1031S				

* For different threads, contact the sales department.

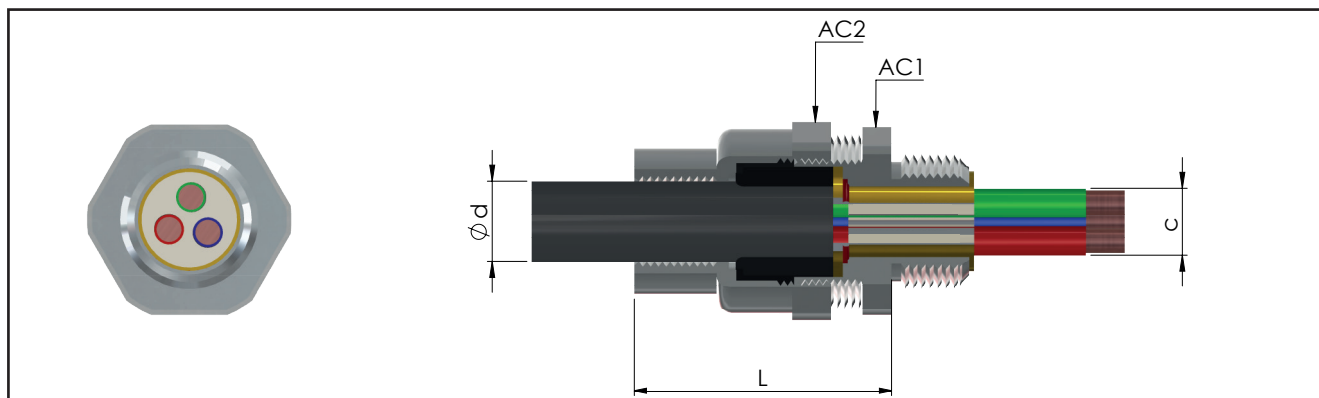

CABLE GLAND SELECTION TABLE

Code Nickel-plated brass	Thread	Code Nickel-plated brass	Thread	Dimensions in mm			Range			Weight Kg	Q.ty of resin ml ***
				AC1	AC2	L	Ød cable max	Øc over cores	n. max cable **		
NAVBF01NB	3/8" NPT	NAVBF16IB	M16x1,5	24	24	48.5	8.6	5.5	11	0,117	1.3
NAVBF1SNB	1/2" NPT	NAVBF20SIB	M20x1,5	24	26	49	11.6	10	11	0,130	3.7
NAVBF1NB	1/2" NPT	NAVBF20IB	M20x1,5	30	32	52.5	14	11	11	0,170	4.2
NAVBF2NB	3/4" NPT	NAVBF25IB	M25x1,5	36	38	51.5	20	15	21	0,233	8.3
NAVBF3NB	1" NPT	NAVBF32IB	M32x1,5	45	47	52.5	27	21	38	0,303	15
NAVBF4NB	1 1/4" NPT	NAVBF40IB	M40x1,5	50	52	53.5	32	27	59	0,401	24
NAVBF5SNB	1 1/2" NPT	NAVBF50SIB	M50x1,5	55	57	56.5	38	33	89	0,530	36
NAVBF5NB	2" NPT	NAVBF50IB	M50x1,5	62/60*	62	56.5	44	35	89	0,470	41
NAVBF6SNB	2" NPT	NAVBF63SIB	M63x1,5	68	77	69	50	43	115	1,079	65
NAVBF6NB	2 1/2" NPT	NAVBF63IB	M63x1,5	75/73*	77	70	56	45	115	0,815	70
NAVBF7SNB	2 1/2" NPT	NAVBF75SIB	M75x1,5	80	82	73.5	62	53	140	0,918	98
NAVBF7NB	3" NPT	NAVBF75IB	M75x1,5	90/85*	90	73.5	68	55	140	1,027	101
NAVBF8NB	3" NPT	NAVBF90IB	M90x1,5	100	110	82	79	65	200	2,071	145
NAVBF9NB	3 1/2" NPT	NAVBF100IB	M100x1,5	115	120	88	91	72	200	2,192	188
NAVBF10NB	4" NPT	NAVBF115IB	M115x1,5	120	130	87.5	98	85	200	2,565	254



* Dimensions with threaded: NPT / ISO.

** At least 20% of the internal section of the bushing must be filled with resin.

*** Maximum quantity of resin calculated with completely empty bushing.

Sample order code of the cable gland

NAVBF	6S	N	B
MODEL	SIZE	THREAD	MATERIAL

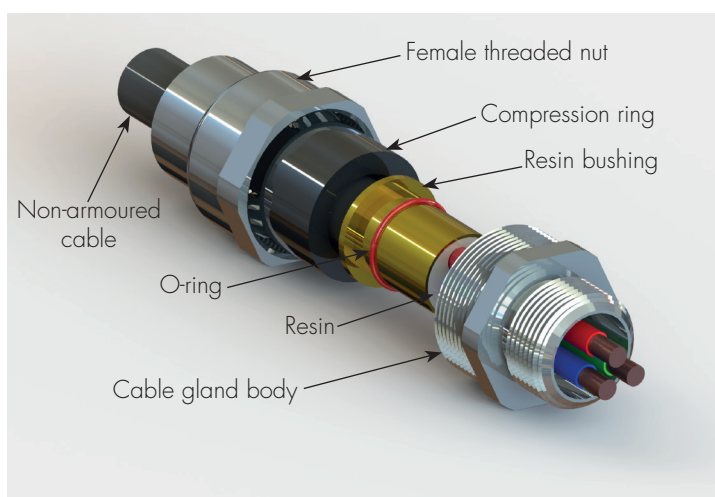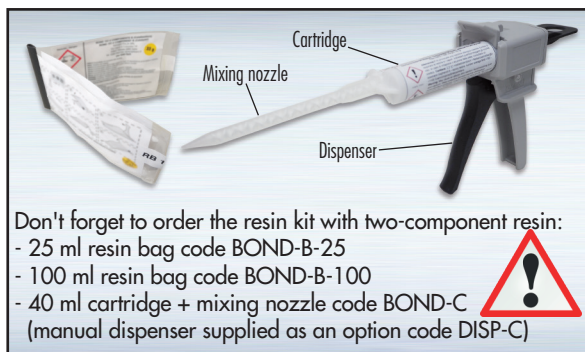

TECHNICAL NOTES:

- Silicone o-rings are supplied for cylindrical threads (ISO metric) for the pre-assembled IP seal on the cable gland.
- The ISO7/1 thread version is available upon request (sample code NAVBF1B).
- Also available in stainless steel AISI 316 (sample code NAVBF1S).
- Other materials on request.
- For "Ex i" intrinsic safety version, RAL 5015 blue nut (sample code NAVBF1IA).